


### TFX

#### TILE FLASHING



#### FEATURES

Perfect watertightness


Easy installation

Weather and UV ray resistant

Lead free

Foam gasket

Aluminium apron to ensure a perfect seal to profiled roofing materials

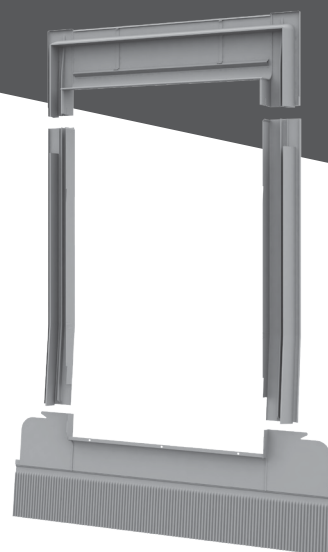

#### APPLICABLE

In roof pitch range of 15-90°

Tile profile height 16-50 mm

#### MATERIAL

Aluminium

Powder coated grey, RAL 7043

#### FLASHING SELECTION GUIDE

WINDOW SIZE CODE	FLASHING CODE
C2A	TFX C2A
C4A	TFX C4A
F6A	TFX F6A
M4A	TFX M4A
M6A	TFX M6A
M8A	TFX M8A
S6A	TFX S6A